


GT-1C7W

Video Tenant Station

The GT-1C7W video tenant station is used to answer incoming calls, unlock the entrance, and trigger an optional output.

The guard station button calls any GT-MKB-N connected in the system. If a pull cord or panic call button are integrated, the GT-1C7W will emit an emergency tone when activated. There are also pan, tilt, zoom, and light control buttons to adjust the camera at the entrance.

Communication is either hands-free or push-to-talk. One GT-1C7W video tenant station and up to three audio tenant stations (GT-1A or GT-ID) can be used in the same suite or apartment. For each GT-1C7W in a system, up to eight Aiphone Type GT apps can be assigned to tenants.

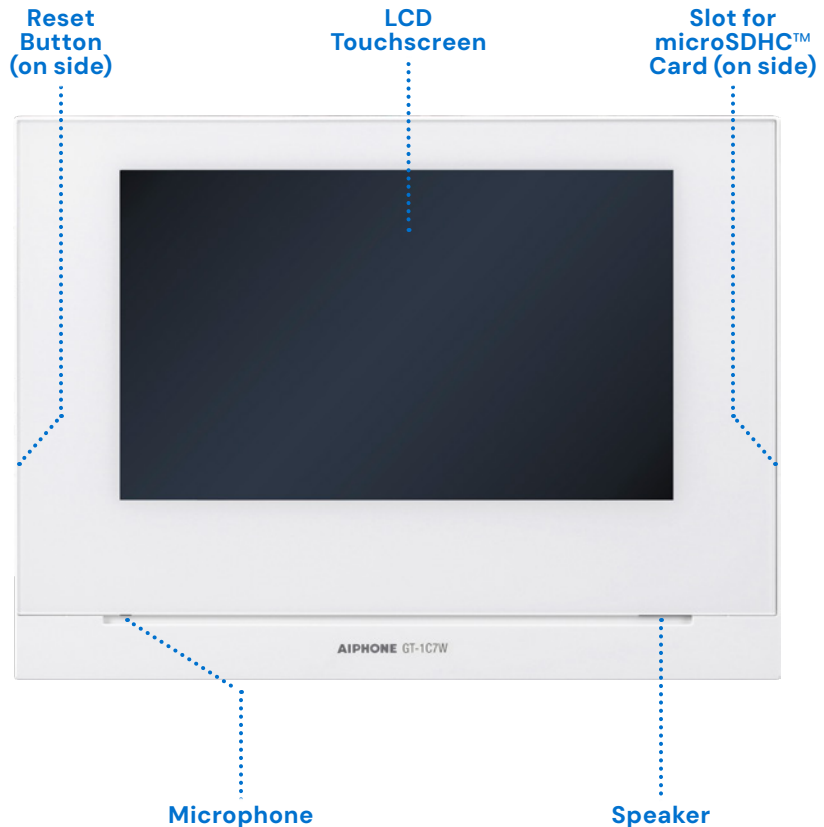

- **7" touchscreen**
- **Up to eight mobile apps per tenant**
- **Hands-free communication**
- **Door release**
- **Guard call**
- **PTZ and brightness control**
- **Call tone volume control**
- **Communication volume control**

- Power Source** 24V DC—supplied by GT-4ZP or power supply
- Communication** Hands-free (VOX) or push-to-talk (simplex)
- Video Display** 7" LCD screen
- microSDHC™** 4-32GB (FAT32) Class 10
- WLAN Interface** IEEE802.11b/g/n
- Upload/Download** 3 Mbps minimum
- Mounting** Surface wall mount with 1-gang box or desk mount with MCW-S/B
- Wire Type** 2-cond., solid, non-shielded, PE insulation—use Aiphone #872002 for audio and #871802 for video
- Weight** ≈ 1.37 lbs (620 g)
- Dimensions** 6 1/8"H 8 1/4"W 1 1/16"D